

## IWT11



### Characteristics

#### Optics

- Polycarbonate Diffuser
- High transmission 90%
- Non-Removable

#### Thermal Interface Material

- High thermal conductivity
- Excellent heat transfer

#### Heat sink

- Aluminium - powder coated
- Excellent thermal conductivity

#### LED Driver

- Rated Supply: 24V AC
- PF > 0.6

#### Mounting

- Handle

#### Installation

- Easy installation

#### Weight

- 1.5 Kg

#### Cable Entry

- 1 Nos.

### Features

- Soft and comfortable light to relieve the fatigue of eyes.
- Excellent CRI for actual colour reproduction.
- Energy saving efficiency and low heat produce.
- AL die-cast housing for excellent heat management.
- special design,
- Highly reliable professional design.

### Applications

- Manufacturing Unit, Ware-house,
- Low Height Applications

- 15W / 30W
- 100 lm/W
- 6500K / 5700K / 3000K
- >70
- Diffused – Wide >160°
- 24V AC, 50Hz
- SMD, Bridgelux ,SDCM<3

### Housing Color





Powder Coated – Black (RAL 9005)



Powder Coated – Grey (RAL 7024)

### Distribution Curve

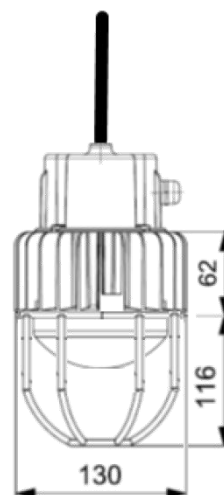

## Product Code

Product Code	System Power (W)	System Lumen (Lm)	CRI (Ra)	Color Temp (CCT)	Body Color	Beam Angle	Diming	Weight (Kg)
IWT11-015SH765GDNXX	15	1500	70	6500K	Grey	Diffused	Non-Dim	1.5
IWT11-030SH765GDNXX	30	3000	70	6500K	Grey	Diffused	Non-Dim	1.5

## Custom Order



Surface Color



Light Color



Light Control

## Accessories



1 Oct 2020-31 Dec 2020