


IWT60



Features

- Soft and comfortable light to relieve the fatigue of eyes.
- Excellent CRI for actual colour reproduction.
- Energy saving efficiency and low heat produce.
- AL extrusion housing for excellent heat management.
- Quick installation, special design,
- Highly reliable professional design.

Applications

- Industry, Ware-house,
- Airport, Shopping Mall, Parking Lot,
- Sports Hall, Tunnel,
- Outdoor Area, Façade



Characteristics

Optics

- Polycarbonate Lens
- with Toughened Glass
- High transmission 88%
- Non-Removable

Thermal Interface Material

- High thermal conductivity
- Excellent heat transfer

Heat sink

- Aluminium - powder coated
- Excellent thermal conductivity

LED Driver

- Rated Supply: 240V AC, 50/60Hz
- PF > 0.95, THD <10%,
- Short circuit, open circuit,
- O/V, U/V protection

Standards Compliance

- IS 10322
- IS 15885 (Part 2/Sec 13)
- EN 61000-3-2, Harmonics Current
- EN 61000-3-3, Voltage Fluctuations, Flicker
- EN 61000-4-5, Surge Immunity
- EN 61547, EMC

Mounting

- U Clamp

Installation

- Easy installation

Weight

- 2.8 Kg

Cable Entry

- 1 Nos.



75W



110 lm/W (±5%)



5700K / 4000K / 3000K



>70



PC Lens – 30° / 60° / 90°



90-305V AC, 50Hz



Inventronics



In-Built, Surge DM 4Kv CM 6Kv



Non dimmable / 1-10V / DALI



SMD-5050, Lumiled / Bridgelux, SDCM <3



Ta: -10°C to 45°C




Lifespan >50000h @ L70 B50

Housing Color



Powder Coated – Grey (RAL 7024)

Distribution Curve

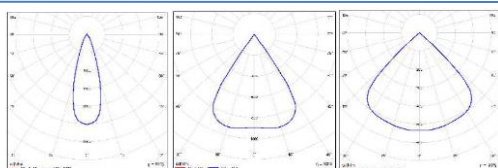

Product Code



Product Code	System Power (W)	System Lumen (Lm)	CRI (Ra)	Color Temp (CCT)	Body Color	Beam Angle	Diming	Weight (Kg)
IWT60-075SU757GNNXX	75	8250	70	5700K	Grey	30°	Non-Dim	2.8
IWT60-075SU757GMNXX	75	8250	70	5700K	Grey	60°	Non-Dim	2.8
IWT60-075SU757GWNXX	75	8250	70	5700K	Grey	90°	Non-Dim	2.8
IWT60-075SU757GNAXX	75	8250	70	5700K	Grey	30°	1-10V	2.9
IWT60-075SU757GMAXX	75	8250	70	5700K	Grey	60°	1-10V	2.9
IWT60-075SU757GWAXX	75	8250	70	5700K	Grey	90°	1-10V	2.9
IWT60-075SU757GNAXX	75	8250	70	5700K	Grey	30°	DALI	2.9
IWT60-075SU757GMAXX	75	8250	70	5700K	Grey	60°	DALI	2.9
IWT60-075SU757GWAXX	75	8250	70	5700K	Grey	90°	DALI	2.9

Custom Order

Accessories

