


IWS10



Characteristics

Optics

- Borosilicate Glass Lens
- High transmission 93%
- Non-Removable

Thermal Interface Material

- High thermal conductivity
- Excellent heat transfer

Heat sink

- Aluminium - powder coated
- Excellent thermal conductivity

LED Driver

- Rated Supply: 240V AC, 50/60Hz
- PF > 0.95, THD < 10%
- Short circuit, open circuit,
- O/V, U/V protection

Standards Compliance

- IS 10322
- IS 15885 (Part 2/Sec 13)

Mounting

- Pole Dia 50mm Max

Installation

- Easy installation

Weight

- 1.2 Kg

Cable Entry

- 1 Nos.

Housing Color




Powder Coated – Black (RAL 9005)



Powder Coated – Grey (RAL 7024)

Distribution Curve



Features

- Soft and comfortable light to relieve the fatigue of eyes.
- Excellent CRI for actual colour reproduction.
- Energy saving efficiency and low heat produce.
- AL die-cast housing for excellent heat management.
- Quick installation, special design,
- Highly reliable professional design.

Applications

- Roadways, Pathways, Highways
- Industry, Ware-house, Airport,
- Shopping Mall, Parking Lot,
- Sports Hall



15W / 20W / 30W / 45W



120 lm/W



6500K / 5000K / 3000K



>80



Glass Lens – 140°x60°



140-270V AC, 50Hz



Inventronics / Fulham



In-Built, Surge DM 4Kv CM 6Kv



Non dimmable / 1-10V / DALI




COB, Citizen / Bridgelux , SDCM <3



Ta: -10°C to 45°C




Lifespan >50000h @ L70 B50

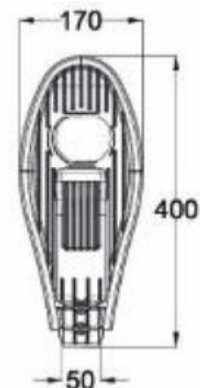

Product Code

Product Code	System Power (W)	System Lumen (Lm)	CRI (Ra)	Color Temp (CCT)	Body Color	Beam Angle	Diming	Weight (Kg)
IWS10-015CP865GONXX	15	1800	80	6500K	Grey	140°x60°	Non-Dim	1.2
IWS10-020CP865GONXX	20	2400	80	6500K	Grey	140°x60°	Non-Dim	1.2
IWS10-030CP865GONXX	30	3600	80	6500K	Grey	140°x60°	Non-Dim	1.2
IWS10-045CP865GONXX	45	5400	80	6500K	Grey	140°x60°	Non-Dim	1.2
IWS10-015CP865GOAXX	15	1800	80	6500K	Grey	140°x60°	1-10V	1.2
IWS10-020CP865GOAXX	20	2400	80	6500K	Grey	140°x60°	1-10V	1.2
IWS10-030CP865GOAXX	30	3600	80	6500K	Grey	140°x60°	1-10V	1.2
IWS10-045CP865GOAXX	45	5400	80	6500K	Grey	140°x60°	1-10V	1.2
IWS10-015CP865GODXX	15	1800	80	6500K	Grey	140°x60°	DALI	1.2
IWS10-020CP865GODXX	20	2400	80	6500K	Grey	140°x60°	DALI	1.2
IWS10-030CP865GODXX	30	3600	80	6500K	Grey	140°x60°	DALI	1.2
IWS10-045CP865GODXX	45	5400	80	6500K	Grey	140°x60°	DALI	1.2

Custom Order

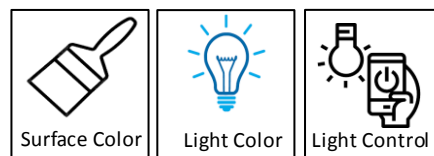

Accessories

